








EC-2730, EC-2750C, EC-2760 & EC-2760C-M
Compact Riveters Series

Operating Instructions



Colour Coded Rivet Sizes

Colour Code	Rivet Sizes	Drill Sizes
 Red	2.4mm	2.5mm
 Green	3.2mm	3.3mm
 Blue	4.0mm	4.1mm
 Yellow	4.8mm	4.9mm
 Grey	6.4mm	6.5mm

Performance on Test

EC-2750C versus traditional Lattice Style Riveters

Popping 200 x 5mm Aluminium Rivets			
2750C		Traditional Lattice Style Riveter	
Kgf Force	Pulls	Kgf Force	Pulls
8.2	2	11.5	1-2

Popping 10 x 6mm Aluminium Rivets			
2750C		Traditional Lattice Style Riveter	
Kgf Force	Pulls	Kgf Force	Pulls
14	2-3	20	2


Popping 10 x 5mm Steel Rivets			
2750C		Traditional Lattice Style Riveter	
Kgf Force	Pulls	Kgf Force	Pulls
13.1	3	20	2

Performance on Test


EC-2760C-M versus traditional Gun Riveters

Popping 10 x 5mm Aluminium Rivets			
2760C-M		Traditional Gun Riveter	
Kgf Force	Pulls	Kgf Force	Pulls
12.6	2	31.5	4


EC-2750C User instructions

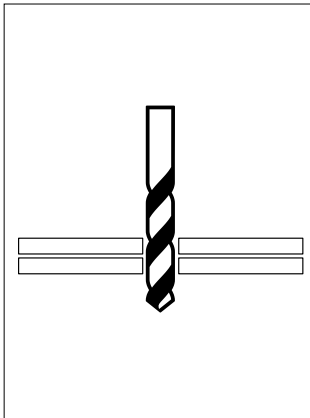


Drill hole through materials to be riveted.

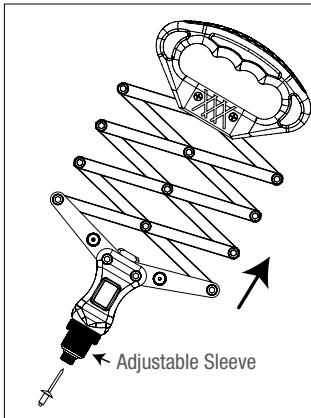

Extend Lazy Tong Riveter, insert rivet and adjust sleeve if required.

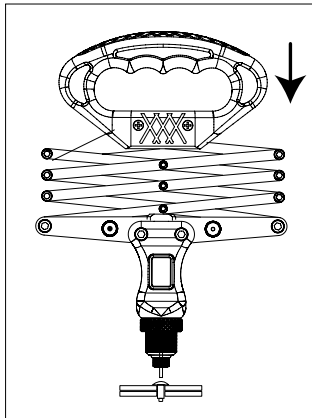

Align rivet, push handle to fix rivet. Repeat until rivet snaps and then remove riveter.

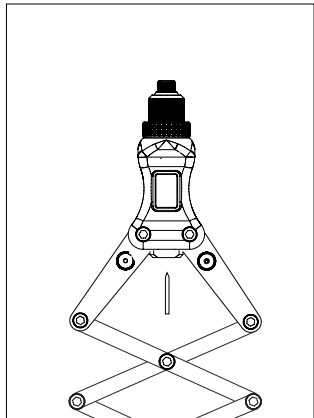


Open lattice fully to remove rivet stem.


Operating Instructions

Compact Series Riveters


EC-2760C User instructions

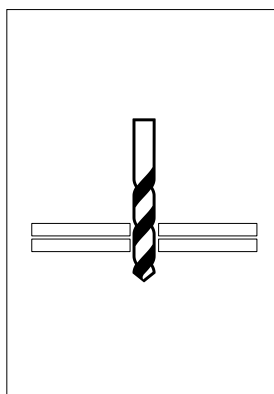


Drill hole through materials to be riveted.

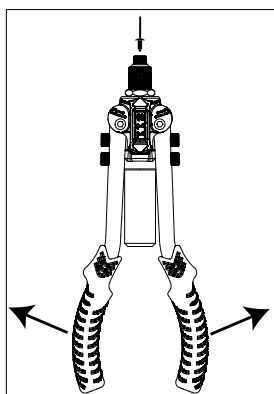


Open handles to insert rivet.

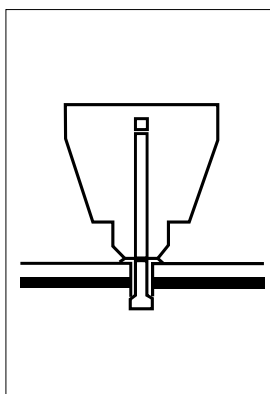

Insert the riveter into the hole.

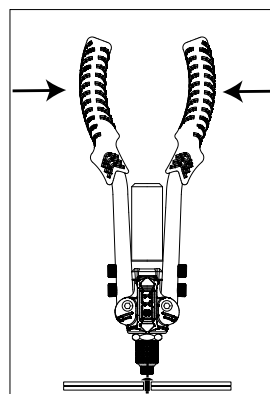


Close handles to fix rivet. Repeat until rivet snaps. The rivet stem falls into the collector.

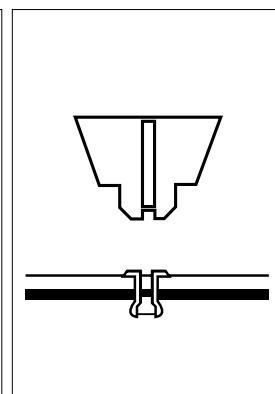


Remove riveter and open handles fully to remove rivet stem.


EC-2760C-M User instructions

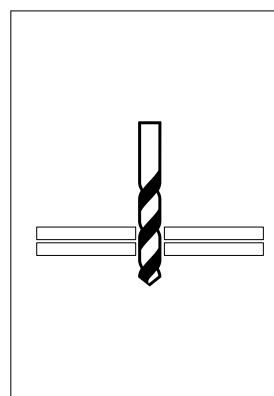


Drill hole through materials to be riveted.

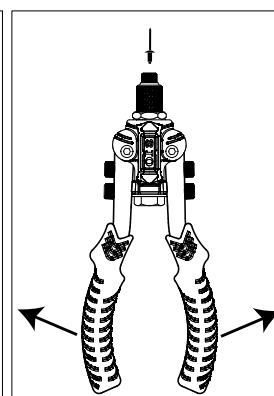


Open handles to insert rivet.

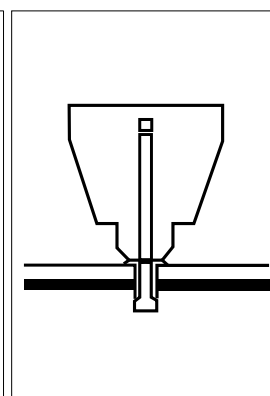

Insert the riveter into the hole.

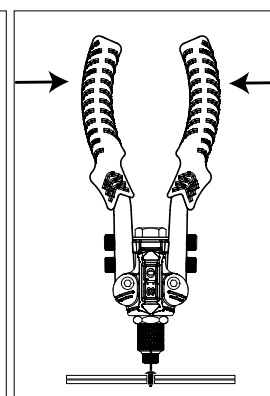


Close handles to fix rivet. Repeat until rivet snaps.

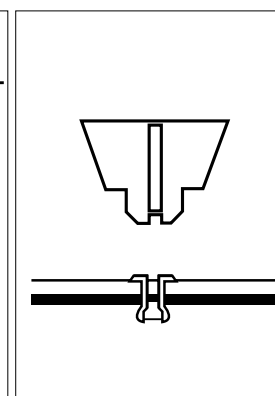


Remove riveter and open handles fully to remove rivet stem.


EC-2730C User instructions

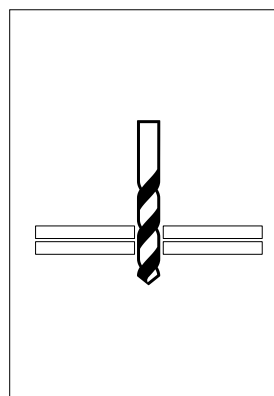


Drill hole through materials to be riveted.

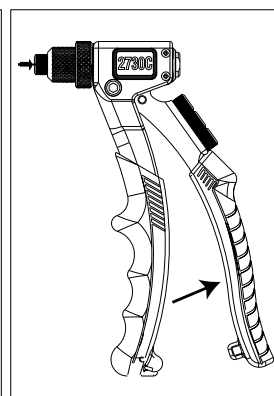


Open handle to insert rivet.

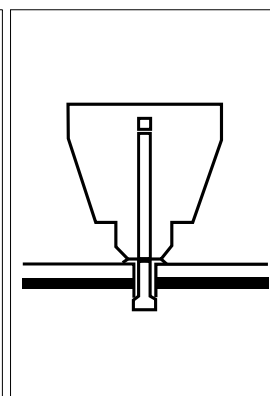

Insert the riveter into the hole.

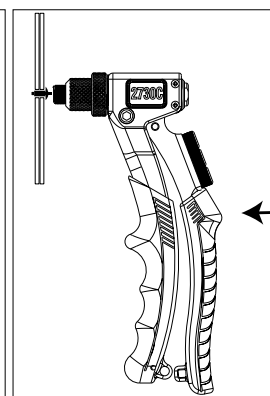

Squeeze handle to fix rivet. Repeat until rivet snaps.

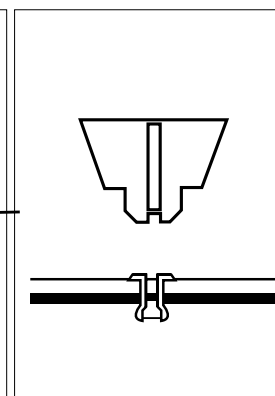

Remove riveter and open handles fully to remove rivet stem.

ECLIPSE

COMPACT RIVETERS OPERATING MANUAL

Available from all good professional tools stockists



These products are guaranteed against defects in manufacturing, subject to wear and tear and the provision of reasonable care and maintenance.

This does not affect your statutory rights.

CUSTOMER SERVICE CENTRE

Spear & Jackson Australia PTY LTD
PO BOX 4400
Dandenong South, Victoria
Australia 3175

Tel: 1300 731 818

Email: sales@spearandjackson.com.au

Spear & Jackson New Zealand PTY LTD

18 Barrhead Place

Avondale, Auckland NZ

Tel: 09 828 5049

Fax: 09 828 8729

Email: sales@spear-and-jackson.co.nz

Follow us on:



FIND OUT MORE AT www.spearandjackson.com.au